



Features

- Low zener impedance
- Low regulation factor
- Glass passivated junction
- High temperature soldering guaranteed:
260°C/10S at terminals

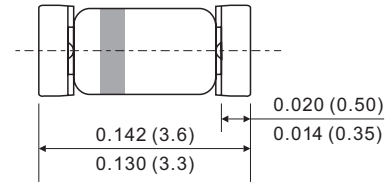

LL-34

Mechanical Data

- Case: LL-34 molded glass body
- Terminals: Plated axial leads, solderable per MIL-STD 750, method 2026
- Polarity: Color band denotes cathode end
- Mounting Position: Any
- Weight: 0.002 ounce, 0.05 grams

Maximum Ratings & Thermal Characteristics


(Ratings at 25°C ambient temperature unless otherwise specified.)

Parameter	Symbols	Value	Unit
Zener Current see Table Characteristics			
Power Dissipation at Tamb=25 C(Note 1)	P_{tot}	500	mW
Junction Temperature	T_j	200	°C
Storage Temperature Range	T_{STG}	-65 to +200	°C
Thermal resistance junction ambient(Note 1)	R_{qJA}	0.3	K/mW
Forward voltage at IF=200mA	V_F	1.1	V


Note:

1)Valid provided that leads at a distance of 10mm from case are kept at ambient temperature

Device Type	Nominal Zener Voltage Vz@IzT (Volts)	Test Current IzT (mA)	Maximum Zener Impedance		Maximum Reverse Leakage Current		Typical Temperature Coefficient (%/ °C)	Maximum Regulator Current IzM (mA)
			ZzT@IzT	Zzk@Izk=0.25mA	I _R	@V _R		
			Ohms	Ohms	mA	Volts		
ZMM5221B	2.4	20	30	1200	100	1.0	-0.085	191
ZMM5222B	2.5	20	30	1250	100	1.0	-0.085	182
ZMM5223B	2.7	20	30	1300	75	1.0	-0.080	168
ZMM5224B	2.8	20	30	1400	75	1.0	-0.080	162
ZMM5225B	3.0	20	29	1600	50	1.0	-0.075	151
ZMM5226B	3.3	20	28	1600	25	1.0	-0.070	138
ZMM5227B	3.6	20	24	1700	15	1.0	-0.065	126
ZMM5228B	3.9	20	23	1900	10	1.0	-0.060	115
ZMM5229B	4.3	20	22	2000	5.0	1.0	+0.055	106
ZMM5230B	4.7	20	19	1900	5.0	2.0	+0.030	97
ZMM5231B	5.1	20	17	1600	5.0	2.0	+0.030	89
ZMM5232B	5.6	20	11	1600	5.0	3.0	+0.038	81
ZMM5233B	6.0	20	7	1600	5.0	3.5	+0.038	76
ZMM5234B	6.2	20	7	1000	5.0	4.0	+0.045	73
ZMM5235B	6.8	20	5	750	3.0	5.0	+0.050	67
ZMM5236B	7.5	20	6	500	3.0	6.0	+0.058	61
ZMM5237B	8.2	20	8	500	3.0	6.5	+0.062	55
ZMM5238B	8.7	20	8	600	3.0	6.5	+0.065	52
ZMM5239B	9.1	20	10	600	3.0	7.0	+0.068	50
ZMM5240B	10	20	17	600	3.0	8.0	+0.075	45
ZMM5241B	11	20	22	600	2.0	8.4	+0.076	41
ZMM5242B	12	20	30	600	1.0	9.1	+0.077	38
ZMM5243B	13	9.5	13	600	0.5	9.9	+0.079	35
ZMM5244B	14	9.0	15	600	0.1	10	+0.082	32
ZMM5245B	15	8.5	16	600	0.1	11	+0.082	30
ZMM5246B	16	7.8	17	600	0.1	12	+0.083	28
ZMM5247B	17	7.4	19	600	0.1	13	+0.084	27
ZMM5248B	18	7.0	21	600	0.1	14	+0.085	25
ZMM5249B	19	6.6	23	600	0.1	14	+0.085	24
ZMM5250B	20	6.2	25	600	0.1	15	+0.086	23
ZMM5251B	22	5.6	29	600	0.1	17	+0.087	21.2
ZMM5252B	24	5.2	33	600	0.1	18	+0.088	19.1
ZMM5253B	25	5.0	35	600	0.1	19	+0.089	18.2
ZMM5254B	27	4.6	41	600	0.1	21	+0.090	16.8
ZMM5255B	28	4.5	44	600	0.1	21	+0.091	16.2
ZMM5256B	30	4.2	49	600	0.1	23	+0.091	15.1
ZMM5257B	33	3.8	58	700	0.1	25	+0.092	13.8
ZMM5258B	36	3.4	70	700	0.1	27	+0.093	12.6
ZMM5259B	39	3.2	80	800	0.1	30	+0.094	11.5
ZMM5260B	43	3.0	93	900	0.1	33	+0.095	10.6
ZMM5261B	47	2.7	150	1000	0.1	36	+0.095	9.7
ZMM5262B	51	2.5	125	1100	0.1	39	+0.096	8.9
ZMM5263B	56	2.2	150	1300	0.1	43	+0.096	8.1
ZMM5266B	68	1.8	230	1600	0.1	52	+0.097	7.3
ZMM5267B	75	1.7	270	1700	0.1	56	+0.098	6.5

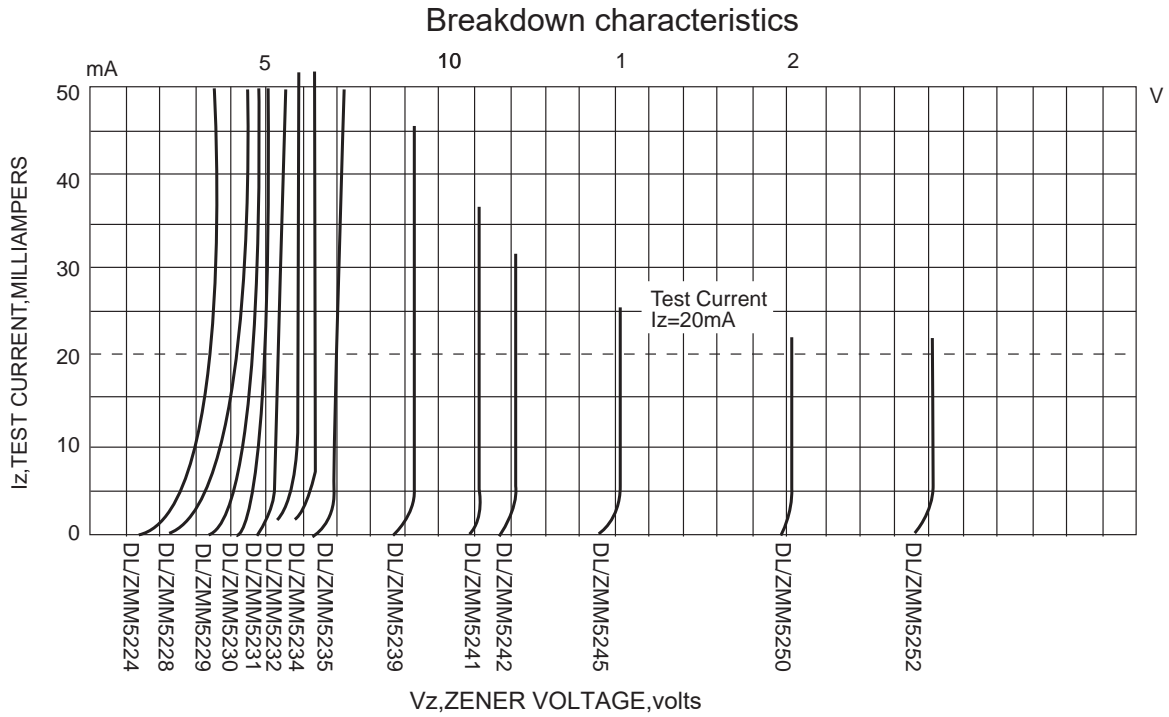

Admissible power dissipation versus ambient temperature
 Valid provided that leads are kept at ambient temperature at a distance of 10mm from case

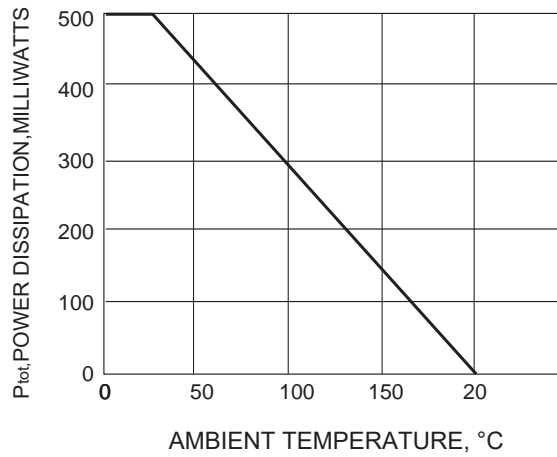

Package Information

Qty: 3,000/Tape and reel